LOAN DOCUMENT

	PHOTOGRAPH THIS	SHOET
NUMBER	LEVEL.	INVENTORY
DTIC ACCESSION NUMBER	etion of One-Veni bio DOCUMENT IDENTIFICATION 44	venting Test
	DISTRIBUTION Approved for F Distribution	STATEMENT A Public Release Turn Unlimited
	DISTRIBUTION	ON STATEMENT
ACCESSION FOR NTIS GRAMS DTIC TRAC UNANNOUNCER JUSTIFICATION BY DISTRIBUTION/ AVAILABILITY CODES DISTRIBUTION AVAILABILITY AND/OR SPECIAL DISTRIBUTION STAMP		DATE ACCESSIONED A H
·		DATE RETURNED
20001214	102	
	IVED IN DTIC HOTOGRAPH THIS SHEET AND RETURN TO DTIC-FI	REGISTERED OR CERTIFIED NUMBER
DTIC ROM 70A	DOCUMENT PROCESSING SHEET	PREVIOUS ENTIONS MAY BE USED UNTIL



DEPARTMENT OF THE AIR FORCE HEADQUARTERS AIR FORCE CENTER FOR ENVIRONMENTAL EXCELLENCE BROOKS AIR FORCE BASE TEXAS

27 Jun 94

MEMORANDUM FOR 437 SUPPORT GROUP/CEV ATTN: MR. MARK SMITH

FROM: HQ AFCEE/ERT 8001 Arnold Drive

Brooks AFB TX 78235-5357

SUBJECT: Completion of One-Year Bioventing Test, Fire Training Area, FT-03

The Air Force Center for Environmental Excellence (AFCEE) one-year bioventing test and evaluation project at the Fire Training Area, FT-03 has been completed. Figure 1 provides general site information and Table 1 provides a summary of initial, six-month, and one-year fuel biodegradation rates measured at several monitoring points. Biodegradation rates have varied slightly during the one-year pilot test. Some of these changes can be explained by soil temperature variations. Table 2 provides a summary of initial and final soil and soil gas sampling results for total recoverable petroleum hydrocarbons (TRPH) and benzene, toluene, ethylbenzene, and zylenes (BTEX). Figure 2 is a graphical representation of the soil sampling data. Based on results from your site and 109 other sites currently under operation, bioventing is cost-effectively remediating fuel contamination in a reasonable time frame. We recommend its continued application at other sites on your installation using the criteria in the AFCEE Test Plan and Technical Protocol for a Field Treatability Test for Bioventing, May 92. and Addendum One to Test Plan and Technical Protocol for a Field Treatability Test for Bioventing-Using Soil Gas Surveys to Determine Bioventing Feasibility and Natural Attenuation Potential, Feb 94.

The one-year sampling effort was not intended to collect the large number of samples required for statistical significance. It was conducted to give a qualitative indication of changes in contaminant mass. Soil gas samples are somewhat similar to composite samples in that they are collected over a wider area. Thus, they provide a good indication of changes in soil gas profiles and volatile contaminant mass (see Addendum One). Soil samples, on the other hand, are discrete point samples subject to large variabilities over small distances/soil types. This variability, coupled with known sampling and analytical variabilities, would require the collection of a large number of samples to conclusively determine "real" changes in soil contamination. Due to the limited number of final samples collected under this effort, these results should not be viewed as conclusive indicators of bioventing progress or evidence of the success or failure of this technology. In situ respiration tests are considered to be better indicators of hydrocarbon remediation than limited soil sampling.



- AQMOI-03-0523

Data from your base and many others indicate that BTEX compounds are preferentially biodegraded over TPH. Since BTEX compounds represent the most toxic and mobile fuel constituents, a BTEX standard is a risk-based standard. We strongly encourage its use over an arbitrary TPH standard. Attachment 3 summarizes the BTEX/TPH issue and a report to be sent under separate cover will assist you in negotiating for a BTEX cleanup standard. Our information indicates that South Carolina does not have specific cleanup standards for either BTEX or TPH but bases the ultimate cleanup goal on site specific conditions. We feel such a policy is conducive to negotiating a risk-based approach scenario which will expedite site closure while reducing overall costs.

In general, quantitative destruction of BTEX will occur over a 1 to 2 year bioventing period. Soil gas surveys and respiration tests can be used as BTEX/TPH destruction indicators. In the event that a non-risk-based/TPH cleanup is chosen, a full-scale system should be operated until respiration rates approach background rates. We recommend that confirmatory soil sampling be conducted 4-6 months after background respiration rates are approached.

Sampling results indicate that significant reductions in the BTEX compounds have taken place in the soils within the estimated 30-foot treatment radius of the pilot vent well. In fact all three soil samples collected indicate that the BTEX concentrations are below detection levels. Also note the detection levels shown in Table 2 are well below those required by the South Carolina Department of Health and Environmental Control (i.e., 1 mg/kg BTEX and 10 mg/kg TPH). However, since it appears that the contaminated zone at FT-03 is considerably larger than this 30-foot radius, the results shown in the attached tables can not be considered as representative of the entire site. The oxygen up-take rates shown in Figure 1 indicate that the site is still supporting adequate respiration and degradation rates. Based upon the data in Table 2, AFCEE recommends that the pilot scale bioventing system continue to operate while planning a full-scale expansion of the system with the addition of two additional vent wells. The system expansion can be accomplished through the AFCEE.

Because this is a streamlined test and evaluation project, our contract does not provide for additional reports to the base on pilot study results. The interim results report dated Jan 93 contains as-builts and initial data. This letter summarizes all data collected and provides next step recommendations. AFCEE is no longer responsible for the operation, maintenance, or monitoring of this bioventing system. However, we are in the process of awarding a contract vehicle for extended monitoring, design and expansion of bioventing systems that will be available for your use. Please contact Mr. Marty M. Faile, AFCEE/ERT, DSN 240-4342, COM (210)536-4342, to discuss the technical and contractual options for a full scale expansion.

The blower and accessories are now base property and should continue to be used on this or other bioventing sites. Although current equipment is explosion proof, under no circumstances should it be used for soil vapor extraction unless appropriate explosion-proof wiring is provided. If the base does not want to keep the blower or if you have further questions, please contact us.


On behalf of the AFCEE/ERT staff, I would like to thank you for your support of this bioventing test and evaluation project. The information gained from each site will be invaluable in evaluating this technology and will promote its successful application on other DOD and private sites. I have enclosed a customer satisfaction survey. Please take a few minutes to fill it out and tell us how we did. We look forward to hearing from you.

ROSS N. MILLER, Lt Col, USAF, BSC Chief, Technology Transfer Division

Attachments:

- 1. Site Map
- 2. Analytical Results
- 3. BTEX Paper
- 4. Addendum One
- 5. Survey

cc: HQ AMC/CEVR HQ AFCEE/ERD

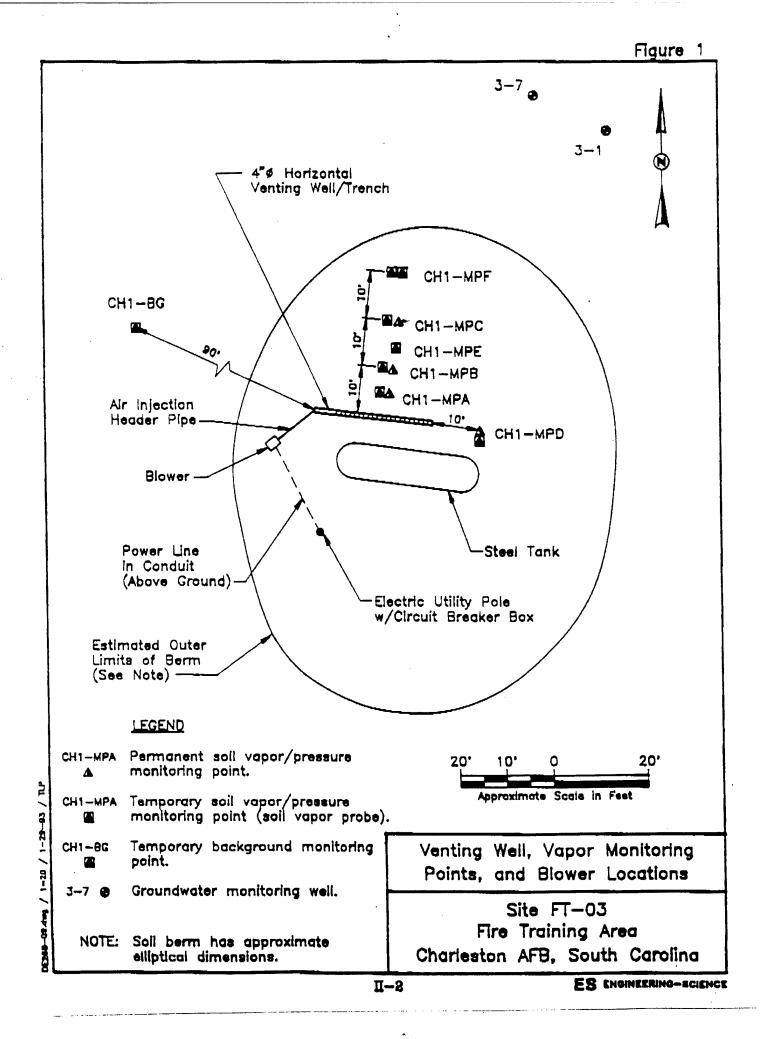

RESPIRATION AND DEGRADATION RATES CHARLESTON AFB, SOUTH CAROLINA SITE FT-03 TABLE 1

	Init	Initial = November 1992	r 1992	-9	6-Month = May 1993	1993	1-Y	1-Year = November 1993	r 1993
	K	Degradation	Soil	×,	Degradation	Soil	К	Degradation	Soil
	(% O ₂ /min)	Rate	Temperature (% O ₂ /min)	(% O ₂ /min)	Rate ^{d/}	Temperature	(% O ₂ /min)	Rate	Temperature
Location - Depth		(mg/kg/year) ^{b/}			(mg/kg/year)	(၁၅)		(mg/kg/year)	(2c)
MPA-3.5	NA ^{a/}	AN	NA	0.0046	270	19.7	0.00085	120	16.9
MPB-3.5	NA	NA	NA	0.0018	110	NS	0.00045	09	NS
MPC-3.25	NA	NA	NA	NSO	NS	NS	0.00036	70	NS
MPD-1.8 MPD-3.9	NA 0.0088	NA 580	NA 19.0	0.0031	370 1690	NS 19.3	0.0028	510	NS 17.3

Not Available - Point was submerged.
 Milligrams hydrocarbons per kilogram soil per year.
 Not Sampled.
 Assumes moisture content of the soil is average of initial and final moistures.

SITE FT-03 TABLE 2

INITIAL AND 1-YEAR SOIL AND SOIL GAS ANALYTICAL RESULTS CHARLESTON AFB, SOUTH CAROLINA

		Sai	mple Local	Sample Location-Depth		
Analyte (Units)"		(fee	t below gro	(feet below ground surface)	(a	
(man) or finance	MPA	MPA-3.5	MPC-3.25	-3.25	MPD-3.9	-3.9
Soil Gas Hydrocarbons	Initial ^{b/}	1-Year	Initial	1-Year	Initial	1-Year
TVH (nnmv)	27	0.47	NS _d	0.78	790	13
Renzene (nomv)	< 0.002	< 0.002	NS	< 0.002	<0.04	< 0.002
Toluene (npmv)	< 0.002	< 0.002	NS	< 0.002	<0.04	<0.002
Fithylhenzene (npmy)	< 0.002	< 0.002	NS	0.002	0.12	<0.002
Xylenes (ppmv)	0.002	<0.002	NS	<0.002	0.22	<0.002
					משאר	
	VW-3.5	-3.5	MPA-2.5	-2.5	MPD-3	?
Soil Hydrocarbons	Initial ^{e/}	1-Year"	Initial	1-Year	Initial	1-Year
TRPH (mg/kg)	1,100	170	51	12	2,200	2,200
Renzene (mo/kp)	<0.73	< 0.0027	<0.72	<0.0006	<1.4	<0.54
Toluene (mø/kg)	2.6	< 0.0027	2.7	<0.0006	<1.1	<0.54
Fibelbenzene (mø/kø)	1.6	< 0.0027	<0.0	<0.0006	<1.6	<0.54
Xylenes (mg/kg)	4.6	<0.0038	1.3	<0.0006	<2.1	<0.75
•				,	,	``
Moisture (%)	17.9	8.5	16.8	9.1	12.6	9.9

✓ TRPH=total recoverable petroleum hydrocarbons; mg/kg=milligrams per kilogram; TVH = total volatile hydrocarbons; ppmv=parts per million, volume per volume;


Variatial soil gas samples collected on May 6, 1993

q Final soil gas samples collected on November 11, 1993

d NS=not sampled.

"Initial soil samples collected on October 29, 1992

" Final soil samples collected on November 11, 1993

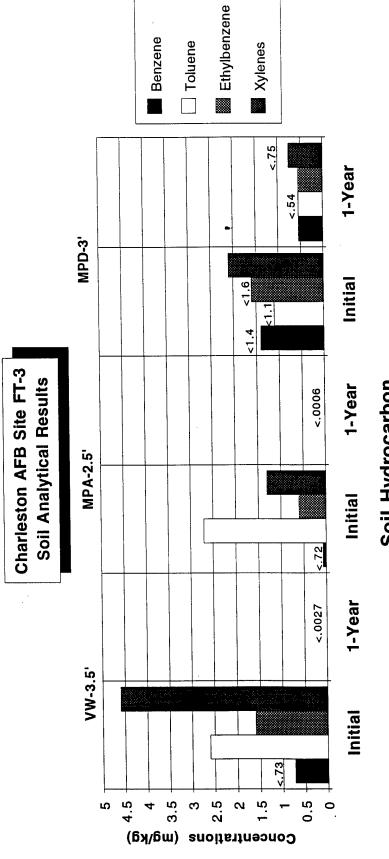

Soil Hydrocarbon

	DEFENSE TECHNICAL INFORMATION CENTER REQUEST FOR SCIENTIFIC AND TECHNICAL REPORTS Title 4 - C						
Tit	AFCEE Collection						
	respondent de la companya de la comp	***************					
1.	Raport Availability (Please check one box)	2a.	Number of	2b. Forwarding Date			
	This report is available. Complete sections 2a - 2f.		es Forwarded				
	This report is not available. Complete section 3.	/	each	July /2001			
Źc.	. Distribution Statement (Please check ONE DOX)	J		1 81			
	Directive 5230.24, "Distribution Statements on Technical Documents cribed briefly below. Technical documents MUST be assigned a distri			n distribution statements, as			
M	DISTRIBUTION STATEMENT A: Approved for public rel	ease.	Distribution is u	nlimited.			
	DISTRIBUTION STATEMENT B: Distribution authorized	to U.S	S. Government /	gencies only.			
	DISTRIBUTION STATEMENT C: Distribution authorized contractors.	l to U,S	3. Government /	Agencies and their			
	DISTRIBUTION STATEMENT D: Distribution authorized DoD contractors only.	to U.S	3. Department o	Defanse (DoD) and U.S			
	DISTRIBUTION STATEMENT E: Distribution authorized components only.	to U.S	3. Department o	Defense (DoD)			
U	DISTRIBUTION STATEMENT F: Further dissemination indicated below or by higher authority.	only as	directed by the	controlling DoD offica			
	DISTRIBUTION STATEMENT X: Distribution authorized individuals or enterprises eligible to obtain export-control Directive 5230.26, Withholding of Unclassified Technical	led tec	hnical data in ac	cordance with DoD			
2d.	Reason For the Above Distribution Statement (in accor	dance w	rith DoD Directive 5.	230.24)			
2e.	Controlling Office	1	. Date of Distri	bution Statement			
	HQ AFLEE		15 Nov	2000			
3. 7	This report is NOT forwarded for the following reasons	s. (Pla	ase check appropris				
3	It was previously forwarded to DTIC on (di	ate) and	d the AD numbe	r is			
	It will be published at a later date. Enter approximate dat	e if kn	DWA.	**************************************			
3	in accordance with the provisions of DoD Directive 3200, because:	12, ins	requested docu	ment is not supplied			
	· · · · · · · · · · · · · · · · · · ·	1-1-14-#1	\$ 3.85 <u>2.154 5.755 (re 6.5 143 64 64 74 75 75 75 75 75 7</u>	The state of the s			
ر. در);;}}#++\\$}********	ardese dals sectororapeus y aproximento acua sono				
eren Pira	t or Type Name Signal	HAPPID					
1	ura Pena	egas :# CLL1 :	42 26)			
	phone 0 - 52/- 11/2/	manner i i i i i i i i i i i i i i i i i i i	AQ Number A	101-03-0623			